



# SmartRigging®

The Intelligent Choice

# SR pin terminal


www.smartrigging.com • info@smartrigging.com

This terminal is totally cast in a sturdy Poly Urethane (PU) coating, which assures a long life span and water tightness.

Our range is supplied in several sizes which assures that we can supply the smallest size possible, reducing weight and windage.

The thimbles are made in high tensile stainless steel what guarantees the smallest diameter possible.

The width of the terminal is fixed, but the pin diameter can be engineered to your specifications.

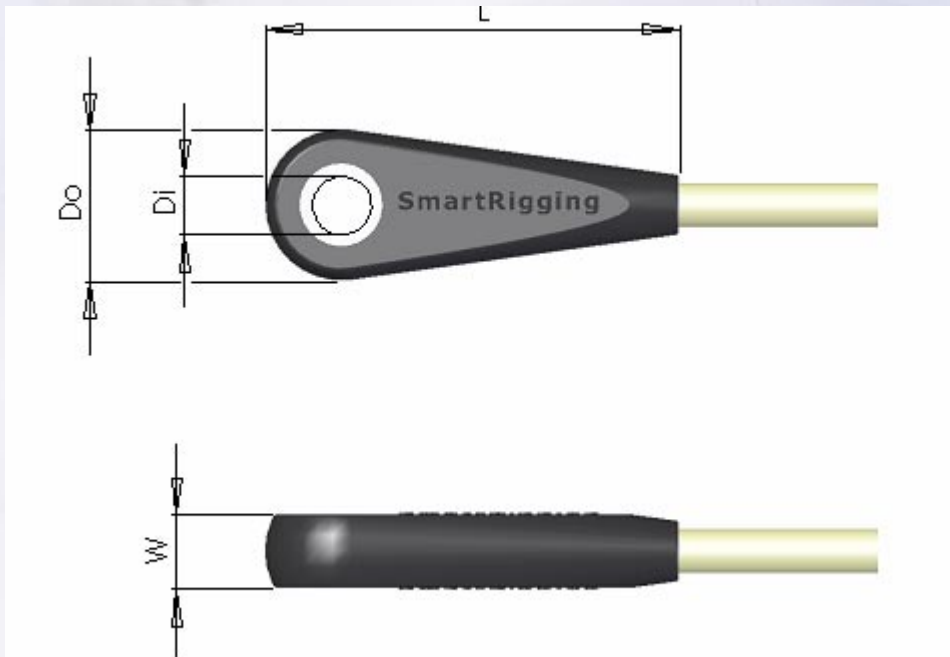

SR Terminal	Break load [Tonne]	L [mm]	Do [m]	Di Std [mm]	Di Max [mm]	W [mm]
SR 5	5	92.0	36.0	12.8	16.5	12.7
SR 10	10	123.0	46.0	19.2	22.8	22.0
SR 15	15	135.0	50.0	22.4	23.6	24.0
SR 20	20	167.0	60.0	25.6	25.0	27.0
SR 30	30	190.0	69.0	28.8	36.0	30.0
SR 40	40	244.0	82.0	32.0	40.0	35.0
SR 50	50	244.0	82.0	32.0	40.0	35.0
SR 60	60	267.0	88.0	35.1	46.0	40.0
SR 70	70	286.0	96.0	39.9	50.0	45.0

More sizes available upon request